


No.	REVISIONS	DATE	BY
2	ISSUED FOR CONSTRUCTION	JUNE 14/95	M.H.
1	REVISED AS PER TOWN COMMENTS	JUNE 4/92	M.H.
0	ISSUED FOR APPROVALS		

- NOTES:
- Storm and sanitary laterals to be PVC DR 28.
 - Single roadway catchbasin leads to be 200mm, double roadway catchbasin leads to be 250mm, PVC DR 35 or Extra Strength Concrete.
 - The position of pole lines, conduits, watermains, sewers and other underground utilities and structures is not necessarily shown on the construction drawings. Where shown the accuracy of the position of such utilities and structures is not guaranteed.
 - Before starting work, the contractor shall check with all utilities involved and inform himself of the exact location of all such utilities and structures and shall assume all liability for damage to them.
 - Hydro and Bell poles are to be anchored to the ground where required so as to ensure the stability of the pole lines.
 - All manhole frames, catchbasin frames, water valves and gas valves are to be adjusted to finished grade.

APPROVED BY:

 TOWN ENGINEER 1995/05/23 DATE

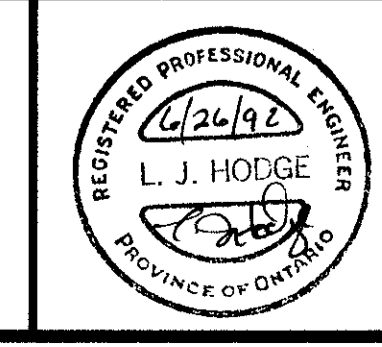

UPPER CANADA CONSULTANTS
 CONSULTING ENGINEERS/PLANNERS
 261 Mortindale Rd
 Unit 1
 St. Catharines, Ontario
 L2W 1A1
 Phone: (416) 688-9400
 Fax: (416) 688-5274

PROJECT NAME:
CHERRY RIDGE
 OWNER:
 729 CANBORO ROAD PROPERTIES INC.
 C/O ATELLA DEVELOPMENTS
 73 ONTARIO ST.
 ST. CATHARINES, ONTARIO
 L2R 5J5

DRAWING TITLE:
GENERAL SITE PLAN

DESIGN: MH DRAWING: JV
 DATE: MARCH 20, 1992
 SCALE: 1:1000
 DRAWING No: 5299-GSP REV: 2